

71694 U.S. PTO
08/938832
09/26/97

PATENT APPLICATION SERIAL NO. _____

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE
FEE RECORD SHEET

MT 4-58

10/15/1997 KHARLING 00000031 08938832
01 FC:108 770.00 OP

Repln. Ref: 10/15/1997 KHARLING 0014323500
DAB:024800 Name/Number:08938832
FC: 704 \$342.00 CR

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

ATTORNEYS AT LAW

CORRESPONDENCE TO:

BOX 1404
ALEXANDRIA, VIRGINIA 22313-1404

TELEPHONE: (703) 836-6620

FAX: (703) 836-2021

TELETYPE: (703) 836-0028

MAILING ADDRESS:

MASON BUILDING
PRINCE STREET
ALEXANDRIA, VIRGINIA 22314-3187

JAMES P. BURNS (1896-1982)

VERNON H. DOANE (1909-1960)

J. PRESTON SWECKER (1904-1996)

PETER H. SMOLKA

ROY H. MASSENGILL

WILLIAM A. KNOELLER
OF COUNSEL

CHARLES T. JOYNER

BRIAN P. O'SHAUGHNESSY
COUNSEL

WILLIAM L. MATHIS

ROBERT S. SWECKER

PLATON N. MANDROS

BENTON S. DUFFETT, JR.

JOSEPH R. MAGNONE

NORMAN H. STEPNO

RONALD L. GRUDZIECKI

FREDERICK G. MICHAUD, JR.

ALAN E. KOPECKI

REGIS E. SLUTTER

SAMUEL C. MILLER III

RALPH L. FREELAND, JR. †

ROBERT G. MUKAI

GEORGE A. HOVANEC, JR.

JAMES A. LABARRE

E. JOSEPH GESS

R. DANNY HUNTINGTON

ERIC H. WEISBLATT

JAMES W. PETERSON†

TERESA STANEK REA*

ROBERT E. KREBS†

ADRIENNE L. WHITE

ROBERT M. SCHULMAN*

WILLIAM C. ROWLAND

T. GENE DILLAHUNTY

PATRICK C. KEANE*

B. JEFFERSON BOGGS, JR.

WILLIAM H. BENZ†

PETER K. SKIFF

RICHARD J. MCGRATH

MATTHEW L. SCHNEIDER

MICHAEL G. SAVAGE

GERALD F. SWISS†

DAVID M. SCHLITZ

ROBERT DEVOS*

B. PARKER LIVINGSTON, JR.

BASSAM N. IBRAHIM*

RONNIE S. JILLIONS

STEVEN S. PAYNE

MICHAEL J. URET†

CHARLES F. WIELAND III

BRUCE T. WIEDER*

TODD R. WALTERS

HAROLD R. BROWN III

KENNETH B. LEFFLER

MARTIN FARRELL*

LESLIE A. MOOI†

DONNA M. MEUTH

ALLEN R. BAUM

STEVEN M. DUBOIS

EARL A. BRIGHT III†

CHARLES H. IEWT

ROBIN L. TESKIN

RICHARD C. EKSTROM

THOMAS M. BLASEY*

BRADLEY J. OLSON*

FRED W. HATHAWAY*

ALLAN M. SOOBERT

JONATHAN D. BASKIN

NHAT D. PHAN

JOHN E. CURTIN

MARK R. KRESLOFF†

MATTHEW P. BLISCHAK*

LESLIE J. BOLEY†

JEFFREY A. PADE*

BARBARA W. WALKER*

MICHAEL A. WRENN

JEFFREY A. HAGENAH†

ROBERT S. BABAY†

REL S. AMBROZY*

WENDI L. WEINSTEIN*

SUSAN M. DADIO

ADAM J. CERMAK

M. DAVID REAM*

MARY ANN DILLAHUNTY†

KRISHNA V. KALIDINDI*

CINDY A. CHERICHETTI

CURTIS A. EVANS*

SAN FRANCISCO, CA AREA OFFICE

BUILDING 4 - SUITE 160

3000 SAND HILL ROAD

MENLO PARK, CALIFORNIA 94025-7116

TELEPHONE: (650) 854-7400

FAX: (650) 854-8275

RESEARCH TRIANGLE, NC AREA OFFICE

1009 SLATER ROAD, SUITE 210

DURHAM, NORTH CAROLINA 27703

TELEPHONE: (919) 941-9240

FAX: (919) 941-1515

M. KATHERINE BAUMEISTER

SUSAN E. HEMINGER

PATENT AGENT

† CALIFORNIA BAR

◇ NORTH CAROLINA BAR

* BARS OTHER THAN VA, CA & NC

September 26, 1997

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application for Reissue of
U.S. Patent No. 5,327,577
Our Ref.: 027556-431

Sir:

Transmitted herewith for filing is the reissue patent application of Jan E. Uddenfeldt for "HANDOVER METHOD FOR MOBILE RADIO SYSTEM".

The application comprises a copy of the original Letters Patent No. 5,327,577 including amended claims 1, 4, 7, 11, 15, 18 and 21 and original claims 2, 3, 5, 6, 8-10, 12-14, 16, 17, 19 and 20.

It is respectfully requested that this application be granted a serial number and filing date pursuant to 37 C.F.R. § 1.53. The requisite DECLARATION OFFER TO SURRENDER, ASSENT OF ASSIGNEE AND POWER OF ATTORNEY and CLAIM FOR CONVENTION PRIORITY will follow.

A check in the amount of \$1,112.00 is enclosed to cover the filing fee. An order for a title report is also enclosed.

Assistant Commissioner for Patents

September 26, 1997

Page 2

Please transfer the drawings of the original Letters Patent to this application. An informal copy of the drawings is submitted herewith as part of the application.


The Commissioner is hereby authorized to charge payment of the following fees or credit any overpayment to Deposit Account No. 02-4800:

- (a) Any additional filing fees required under 37 C.F.R. § 1.16;
- (b) Any patent application processing fees required under 37 C.F.R. § 1.16 for presentation of extra claims.

A duplicate of this letter is enclosed.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS

By: 

Steven M. du Bois

Registration No. 35,023

SMD:jsw
Enclosures

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

BEFORE USING THE ORDER FORM
read the important information on
the reverse side

DEPOSIT ACCOUNT ORDER FORM

MAIL TO: Commissioner of Patents and Trademarks
Washington, D.C. 20231

Date
September 12, 1997

Account
02-4800

Order No.
027556-431

Name and Address of Depositor:

BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, VA 22313-1404

DESCRIPTION OF ARTICLES OR SERVICES TO BE FURNISHED

Re: Reissue of U.S. Letters Patent No. 5,327,577

Please provide a title report for use in connection with the accompanying application for reissue.

If additional space is needed attach separate sheet.



Steven M. Du Bois, Reg. No. 35,023
(Signature)

FOR PROMPT, ACCURATE SHIPMENT PLEASE COMPLETE THE FOLLOWING MAILING LABEL — PLEASE PRINT OR TYPEWRITE

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE
WASHINGTON, D.C. 20231

OFFICIAL BUSINESS

RETURN AFTER FIVE DAYS

YOUR ORDER NO.

027556-431

NAME BURNS, DOANE, SWECKER & MATHIS, L.L.P.

STREET ADDRESS PTO BOX 243X

CITY, STATE, ZIP CODE _____

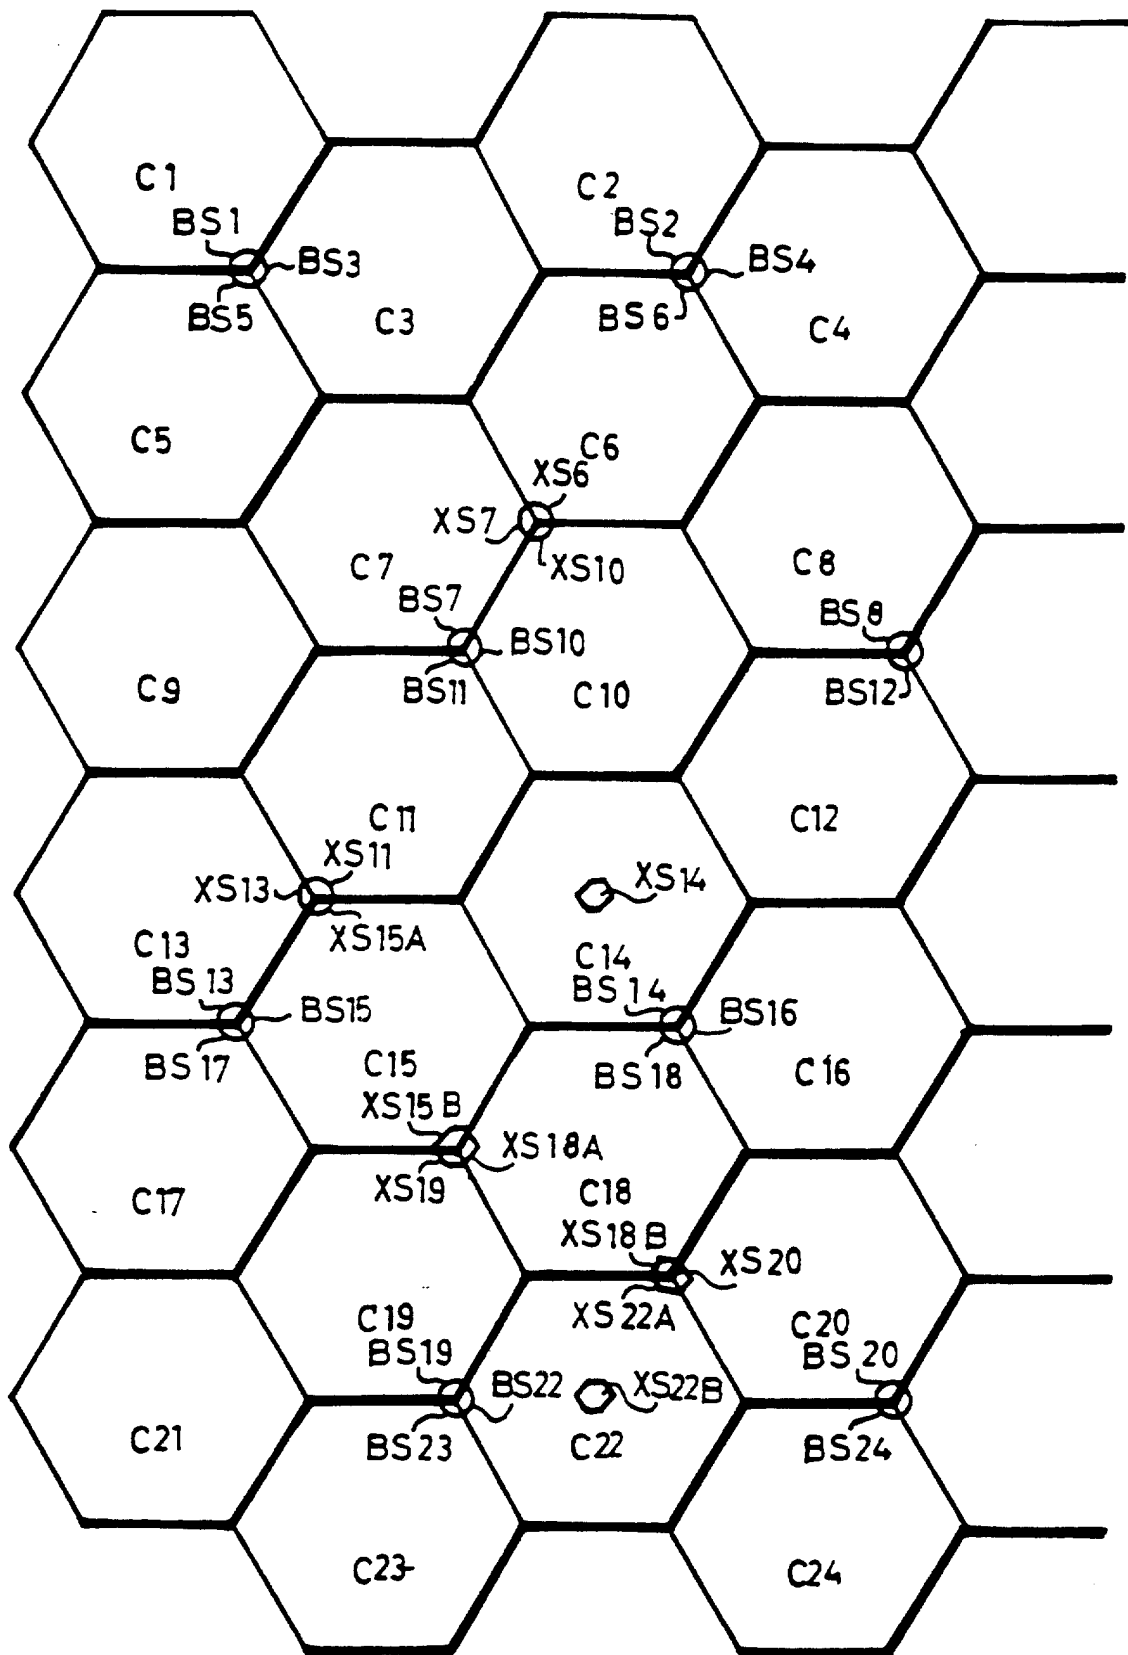


Fig.1

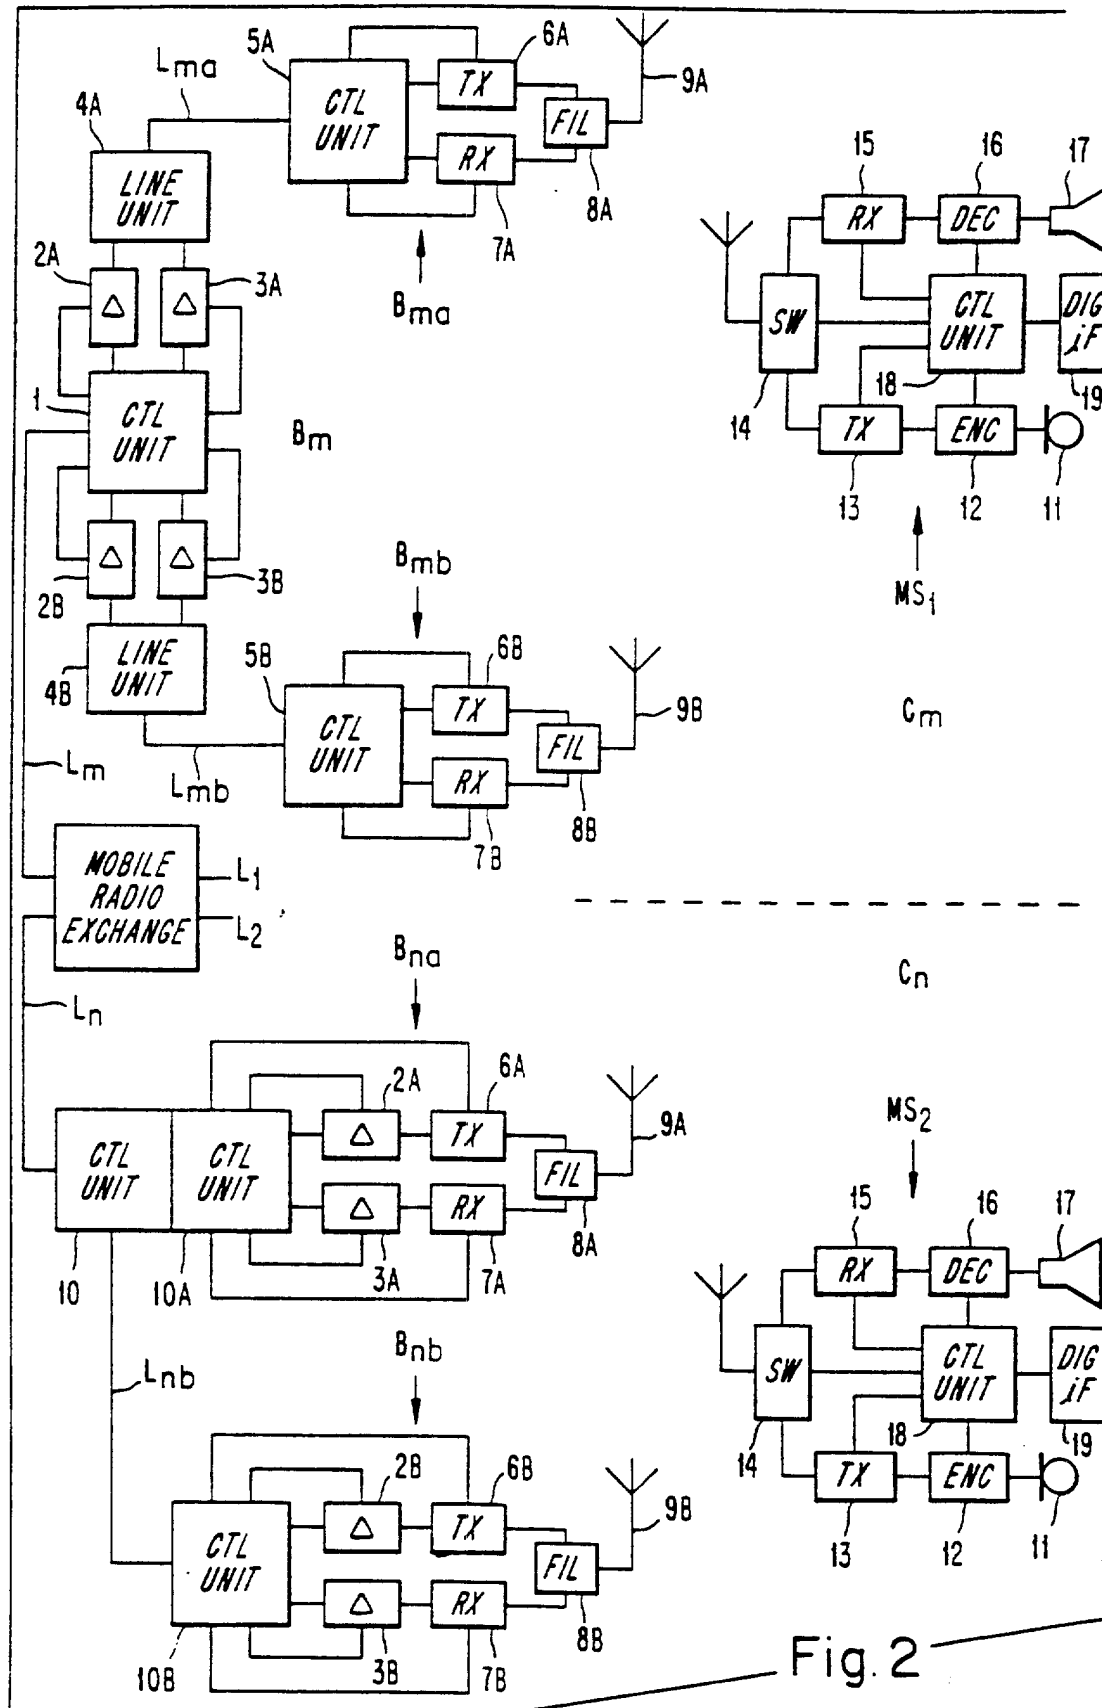


Fig. 2



U. 27577A

United States Patent [19]
Uddenfeldt[11] **Patent Number:** **5,327,577**
[45] **Date of Patent:** **Jul. 5, 1994****[54] HANDOVER METHOD FOR MOBILE
RADIO SYSTEM****[75] Inventor:** Jan-Erik Uddenfeldt, Vällingby,
Sweden**[73] Assignee:** Telefonaktiebolaget L M Ericsson,
Stockholm, Sweden**[21] Appl. No.:** 71,356**[22] Filed:** Jun. 3, 1993**Related U.S. Application Data****[63]** Continuation of Ser. No. 836,874, Feb. 19, 1992, abandoned, which is a continuation of Ser. No. 365,432, Jun. 13, 1998, Pat. No. 5,109,528.**[30] Foreign Application Priority Data**

Jun. 14, 1988 [SE] Sweden 8802229-8

[51] Int. Cl.: H04Q 9/00**[52] U.S. Cl.:** 455/33.2; 455/56.1;
379/60**[58] Field of Search** 455/33.1, 33.2, 51.2,
455/54.1, 56.1, 34.1; 379/59, 60**[56] References Cited****U.S. PATENT DOCUMENTS**

4,211,894	7/1980	Watanabe et al.	179/2
4,596,042	6/1986	Stangl	455/56
4,718,081	1/1988	Brenig	379/60
4,723,266	2/1988	Perry	379/60
4,737,978	4/1988	Burke et al.	379/60
4,759,051	7/1988	Han	379/59
4,765,753	8/1988	Schmidt	455/33.2 X
4,811,380	3/1989	Spear	379/63
4,955,082	9/1990	Hattori et al.	455/33
5,101,501	3/1992	Gilhousen et al.	455/56.1 X
5,109,390	4/1992	Gilhousen et al.	455/33.2 X
5,109,528	4/1992	Uddenfeldt	455/33.2

FOREIGN PATENT DOCUMENTS

0274857 7/1988 European Pat. Off. .
60-42950 3/1985 Japan .

OTHER PUBLICATIONS

Patent Abstracts of Japan, vol. 9, No. 169 (E-328).

Richard C. Bernhardt, User Access in Portable Radio Systems in the Noise Limited Environment, Bell Communications Research Inc., Jun. 1987.

Richard C. Bernhardt, RF Performance of Macroscopic Diversity in Universal Digital Portable Radio Communications: Frequency Reuse Considerations, IEEE Conference, Jun. 1986.

Primary Examiner—Reinhard J. Eisenzopf

Assistant Examiner—Edward Urban

Attorney, Agent, or Firm—Burns, Doane, Swecker & Mathis

[57]

ABSTRACT

The invention relates to a method in mobile radio systems in which the responsibility for transmitting message information to a mobile station (MS_1 , MS_2) is handed over from at least a first base station transmitter (B_{ma} , B_{mb}) to at least a second base station transmitter (B_{na} , B_{nb}). In accordance with the invention, the same radio channel is used, if possible, before and after the handover for transmitting message information to the mobile station. If the same radio channel can be utilized, the handover takes place without the mobile station being informed beforehand of the handover by a special signal or order or the like. In digital mobile radio systems with digital transmission of message information by digital modulation of the radio signals, the transmission is preferably started from a second base station transmitter before the transmission is terminated from a first base station transmitter. During a transmission time substantially the same message information is transmitted to the mobile station from both at least one first and one second base station transmitter.

21 Claims, 2 Drawing Sheets

HANDOVER METHOD FOR MOBILE RADIO SYSTEM

This application is a continuation of application Ser. No. 07/836,374, now abandoned, filed Feb. 19, 1992, which is a continuation of application Ser. No. 07/365,432, filed Jun. 13, 1989, now U.S. Pat. No. 5,109,528.

TECHNICAL FIELD

The present invention relates to a mobile radio system which has a plurality of radio channels for transmitting control information and message information between base stations and mobile stations. More specifically, the invention relates to a method in which the responsibility for transmitting message information to a mobile station is handed over from at least a first base station transmitter to at least a second base station transmitter.

BACKGROUND ART

It is desirable that a mobile radio system has high traffic handling capacity and a high degree of coverage. The traffic handling capacity of a mobile radio system is dependent, inter alia, upon the number of available radio channels and how effectively these channels may be utilised. It is known to arrange several base stations with small covering areas close to each other in a mobile radio system. Available radio channels can then be utilised in a more efficient way for handling peak traffic within a limited geographical area than if base stations with large covering areas are arranged far away from each other in the mobile radio system. Arranging several base stations close to each other can also increase the accessibility in a mobile radio system, particularly if the covering areas of the base stations are mutually overlapping. Two base station with such overlapping covering areas cannot, however, normally use the same radio channel for communication with different mobile stations.

When a mobile station moves from the area covered by one base station to the area covered by another base station in a mobile radio system, the responsibility for communication with the mobile must be transferred from one base station to another. Such transfer in conjunction with an established connection to the mobile station is usually called "handover".

Handover can be a critical function in known traditional mobile radio systems. There is a risk of the established connection being temporarily interrupted or completely lost in conjunction with the handover. There is usually required comparatively extensive signalling in the mobile radio system in conjunction with changing of radio channel at handover. The degree of coverage of a mobile radio system depends, inter alia, on the presence of radio shadows and how the covering areas of the individual base stations overlap each other. The possibility of establishing new connections and maintaining established connections to/from mobiles also depends on the presence of reflections and interference.

For increasing the degree of coverage in a mobile radio system, it is known to transmit substantially the same information to a mobile from two or more base transmitters and to receive information from a mobile at two or more base receivers. The publication "RF PERFORMANCE OF MACROSCOPIC DIVERSITY IN

UNIVERSAL PORTABLE RADIO COMMUNICATIONS: FREQUENCY REUSE CONSIDERATIONS" by Richard C. Bernhardt, from IEEE International Conference on Communications, Jun. 22-25.

- 5 1986, Toronto, Canada describes different types of cells and placing of transmitters and the result of simulations of such a system. The publication "USER ACCESS IN PORTABLE RADIO SYSTEMS IN THE NOISE LIMITED ENVIRONMENT" by Richard C. Bernhardt, from ICC'87, Jun. 1987, Seattle, Wash., U.S.A., describes different types of cell and placing of transmitters as well as comparisons between different criteria and algorithms for the selection of base transmitter.

- U.S. patent application Ser. No. 07/315,561 describes
 15 a mobile radio system and a method of transmitting message information where at least two bases at least partially simultaneously transmit substantially the same message information to a mobile. The object with this is, inter alia, to enable the degree of coverage to be made
 20 greater without the cells in a mobile radio system needing to be reduced, which gives greater freedom in the selection of cell pattern, and fewer handovers. The intention is that the mobile radio system shall be given better possibilities of establishing new connections and
 25 maintaining already established connections. According to the patent application, these objects are achieved by certain relationships between modulation of radio signals and parameters of adaptive equalisers in the mobiles and the distance between base transmitters which
 30 transmit the same message information.

- In cellular mobile radio systems available channels may be allocated to cells and mobiles in various ways. In systems with fixed channel allocation a base for a particular cell may only use certain predetermined
 35 channels. Bases in adjacent cells use different channels. Bases in different cells sufficiently distant from each other may use same channels according to a channel re-use or allocation plan. In systems with adaptive channel allocation some or all channels are a common resource to all base stations, which means that some or all
 40 channels may be used by any base as long as the radio transmission conditions permit, i.e. certain carrier to interference or noise level.

45 SUMMARY OF THE INVENTION

- At least in certain mobile radio systems, it is a problem to make the handover so that the risk of temporary interruption in a connection or that the connection is lost in conjunction with handover is sufficiently small.
 50 This problem is particularly great with peak traffic. Another problem in connection with handover is the comparatively large need for signalling in the mobile radio system. The object of the invention is, inter alia, to ameliorate these problems.

- 55 One object of the present invention is to achieve a handover where the risk of temporary interruption or lost connections can be sufficiently small.

- Another object of the present invention is to achieve a handover where the need of signalling via radio signals in the mobile radio system may be comparatively
 60 small.

- A still further object of the present invention is to achieve a handover which is particularly suitable for mobile radio systems where two or more base transmitters spaced from each other transmit essentially similar
 65 message information to a mobile.

- Yet another object of the invention is to achieve a handover which is particularly suitable for mobile radio

systems with a high degree of coverage and large overlapping between the covering areas of different base transmitters.

In a method in accordance with the invention the responsibility of transferring message information to a mobile station, is handed over from at least one first base transmitter to at least a second base transmitter. Distinguishing for a method in accordance with the invention, and particularly preferred embodiments thereof will be seen from the independent and the dependent claims. Somewhat simplified, it may be said that in a method in accordance with the invention, the same radio channel is preferably used for transmitting message information to the mobile before and after the handover.

The handover preferably takes place without the mobile being informed beforehand that the handover is going to take place. According to a further preferred embodiment of the invention, the radio transmission of message information from a second base station transmitter to the mobile station is started before transmission of message information to the mobile from a first base station transmitter is terminated. Essentially the same message information is thus transmitted during a transition time to the mobile both from a first and a second base station transmitter.

In mobile radio systems where at least two base station transmitters are simultaneously responsible for transmitting message information to at least certain mobiles, it may be preferred not to start or interrupt the transmission from several base transmitters simultaneously in conjunction with the handover. The transmission of message information to the mobile is then preferably started from one of the second base transmitters before initiating transmission of message information from another of the second base transmitters. In such a case, the transmission of message information to the mobile from one of the first base transmitters is preferably terminated before the transmission of such information is terminated from another of the first base transmitters. Initiation and termination of the transmission from the base transmitters preferably takes place in an order such that at least two base transmitters transmit essentially the same message information to the mobiles the whole time.

In the cases where transmission from a second base transmitter must take place on another radio channel than the transmission from a first base transmitter, it is preferable that the radio channels are selected such that during the transition time the mobile station can receive the transmissions from the different base transmitters essentially without interference from each other.

Designing the handover of responsibility for transmitting message information to a mobile in accordance with the invention means several advantages, which are accentuated in preferred embodiments.

Perhaps the most important advantage is that in the cases where the same radio channel is utilised by the bases before, during and after the handover, the need for handover signaling via radio signals can be made particularly small. If the mobile sends and receives on the same channels before, during and after the handover, it does not really need to know whether the responsibility for communication has been handed over. In an extreme case, there is thus no need of handover signalling at all via radio signals in conjunction with handover, and all handover signalling could take place in the stationary part of the mobile radio system. An-

other important advantage is that the risk of temporary interruption in an established connection call to a mobile or that the connection is lost can be made small.

Another advantage is great flexibility with regard to distributing tasks between the mobile and base in conjunction with the handover. Preparations for and initiative to the handover can take place to a greater or lesser extent in the mobile. It will then be possible to form and distribute tasks in conjunction with preparation for, initiation and execution of the handover such that the need of signalling with respect to the handover will be comparatively small.

A still further important advantage with the method in accordance with the invention is that it is particularly suitable in a mobile radio system where at least two base station transmitters are simultaneously responsible for transmitting message information to at least certain mobiles. In such a system the increasing degree of coverage can be utilised to the full in handing over the responsibility in accordance with the invention.

Further advantages ought to be understood by one skilled in the art after having studied the description of preferred embodiments.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 illustrates cells and location of base station transmitters in a mobile radio system where in certain areas two or three base station transmitters simultaneously transmit message information to at least certain mobiles.

FIG. 2 illustrates two mobiles and some stationary parts of a mobile radio system according to FIG. 1.

BEST MODES FOR CARRYING OUT THE INVENTION

A method in accordance with the invention is particularly suitable for a mobile radio system where at least two base station transmitters are simultaneously responsible for transmitting message information to at least certain mobile stations. It seems therefore to be suitable to describe an embodiment of a method in accordance with the invention in connection with such a system.

A cellular mobile radio system illustrated in FIG. 1 has mobile and base stations with transmitters and receivers for radio signals. Message information is transmitted digitally to and from the mobiles by transmission and reception of radio signals with digital modulation corresponding to the message information. The radio signals are sent on one of a plurality of radio channels. Several radio channels can share in time multiplex the same radio frequency, and radio signals can be transmitted to and from several mobiles in different time slots on the radio frequency, these slots being associated with the radio channels.

The mobiles may move within and between the cells of the system. The base transmitters are assigned to the cells so that there is at least one base transmitter for each cell, for transmitting signals to the mobile of the cell.

There is no completely fixed channel allocation for all cells and base stations in the entire system. At least for some base stations and cells there is allowed some freedom in the selection of radio channels. Thus the channel allocation in the system is some kind of dynamic or adaptive channel allocation meaning that at least some channels are a common resource to at least some neighbour bases/cells.

newhat simplified, there is illustrated in FIG. 1 a division of an area into cells and the assignation of base station transmitters to the cells in a mobile telephone system. For the sake of simplicity in FIG. 1, all cells C1 to C24 are illustrated as regular hexagons with sides L. In practice, the cells will probably have different sizes and shapes. In addition, depending on traffic conditions, it will often be suitable with overlapping in the boundary areas between the cells. To a certain extent, the base transmitters can then off-load each other by handling transmissions to mobiles where such transmission should from a purely geographically point of view, be performed by the base transmitters of a contiguous cell.

For each cell C1-C24 there is an ordinary base transmitter BS1-BS24. For contiguous cells these transmitters are conventionally co-located in groups of three. For example, the base transmitter BS1 for the cell C1 is co-located with the base transmitter BS3 for the cell C3 and with the base transmitter BS5 for the cell C5. Correspondingly, the base transmitter BS14 for the cell C14 is co-located with the base transmitter BS16 for the cell C16 and with the base transmitter BS18 for the cell C18. These co-located ordinary base station transmitters are situated in the boundary regions between the cells to which they are assigned. For example, the ordinary base transmitters BS2, BS4 and BS6 are co-located in the boundary areas between the cells C2, C4 and C6.

Further to the ordinary base transmitters BS1-BS24 the system includes a number of extra base transmitters for certain of the cells. Cells C6, C7, C10, C11, C13, C14, C19 and C20 each has one extra base station transmitter. For each of the cells C15, C18 and C22 there are two extra base transmitters. Of the extra base transmitters XS6, XS7, XS10, XS11, XS13, XS15A, XS15B, XS18A, XS18B, XS19, XS20 and XS22A are co-located in groups with three extra base transmitters in each group in a similar manner as the ordinary base transmitters. Accordingly, for example, the extra base transmitter XS15B for the cell C15 is co-located with the extra base transmitter XS19 for the cell C19 and the extra base transmitter XS18A for the cell C18. On the other hand, neither the extra base transmitter XS14 for the cell C14 nor the extra base transmitter XS22B for the cell C22 are co-located with any other base transmitter, but are situated approximately at the centre of the cell with which they are associated.

An extra base transmitter does not need to differ technically from an ordinary base transmitter. For a given cell an extra base transmitter can thus have technical equipment of the same type as an ordinary base transmitter for the same cell. In principle, it can also function in the same way as the ordinary one. If there are two identical base station transmitters for a given cell, either of them may be respectively regarded as ordinary or extra in certain cases.

The extra base transmitter or transmitters for a given cell transmit radio signals which are substantially the same as those sent by the ordinary base transmitter of the cell. The signals are digitally modulated with selective digital message information to the individual mobiles in the cell. The radio signals may also be digitally modulated with general control information common to all mobiles concerned. A mobile in a cell for which there is one or more extra base transmitter can therefore receive, at least in certain cases, corresponding signals from more than one base transmitter approximately simultaneously within the same frequency range. Depending on the mutual, relative positions in

cell of the mobiles and bases as well as the transmission times and propagation paths of the radio signals from the base transmitters to the mobile stations, corresponding signals from different base transmitters can be received without, or with a given time shift at the mobile. The greater the distance between the base transmitters associated with the cell, the greater in general can be the time shift. When the ordinary base station transmitters and the extra base station transmitters are situated according to FIG. 1, the distance between two base transmitters for the same cell varies between L and $2L$, i.e. between the side and diameter of the regular hexagons. If, for the sake of simplicity, reflections are ignored and the assumption made that the base transmitters transmit without mutual time shifting, the time reception shift at the mobile station could then attain a maximum of $2L/c$, where c is the propagation rate of the radio signals.

In FIG. 2 there are illustrated parts of a mobile radio system in accordance with FIG. 1. A mobile radio exchange MSC is connected via cables $L_1, L_2, \dots, L_m, L_n$ to a plurality of bases of which two, B_m and B_n are illustrated in FIG. 2.

The base B_m has a central unit connected via cables L_{ma} and L_{mb} to two transceiver units B_{ma} and B_{mb} situated at a distance from the central unit. The central unit of the base B_m includes a central line and control unit 1, transmission time shifting means 2A and 2B, one for each of the transceivers, reception time shifting means 3A and 3B, one for each of the transceivers and line units 4A and 4B, one for each of the transceivers.

Both transceivers in the base B_m are alike. Each such transceiver contains a line and control unit 5A or 5B, transmitter means 6A or 6B, receiver means 7A or 7B, a transmission-reception filter 8A or 8B and an antenna 9A or 9B.

The base B_n differs partly from base B_m , primarily due to its central line and control unit 10 being situated in juxtaposition with one of its transceivers B_{na} . Accordingly, no cable with associated line units corresponding to $L_m, L_{mb}, 4A-5B$ is needed for the transceiver B_{na} , but only for the other transceiver B_{nb} . In addition, no transmission or reception time shifting means is included in any central unit in B_n , but the corresponding means 2A, 2B, 3A and 3B are respectively included in transceivers B_{na} and B_{nb} .

The mobiles MS_1 and MS_2 are mutually alike. Each mobile includes sound sensing means 11, encoding means 12, transmitting means 13, transmit-receive switch 14, reception means 15, equaliser and decoding means 16, sound reproducing means 17, control means 18 and means 19 for feeding in and out or presentation of digital information.

Apart from the bases having two transceiver units at a distance from each other, and having controllable transmission and reception time shifting means, the mobile radio system in FIG. 2 functions in most respects in a way well-known in mobile radio systems. No complete description of how the system functions in different respects should therefore be necessary for one skilled in the art, and it should only be necessary to describe what is unique or unusual in the mobile radio system according to FIG. 2. One not skilled in the art of mobile radio systems is referred to the technical literature.

Message information e.g. speech or data that the mobile radio exchange forwards towards a mobile in the cell C_m , e.g. the MS_1 , is transmitted from the mobile

io exchange via the cable L_m to the line and control unit 1. From here the information is transferred via the transmission time shifting means 2A, line unit 4A, cable L_{ma} and line and control unit 5A to the transmitting means 6A. The transmitting means 6A transmits, via the transmission-reception filter 8A and antenna 9A, radio signals with digital modulation in correspondance with the message information from the mobile radio exchange.

The message information from the mobile radio exchange is also transferred from the line and control unit 1 via the transmission time shifting means 2B, line unit 4B, cable L_{mb} and line and control unit 5B to the transmission means 6B in the transceiver B_{mb} . The transmission means 6B transmits, via the transmission reception filter 8B and antenna 9B, radio signals with digital modulation in correspondance with the information from the mobile radio exchange.

Depending on the delay in transferring the message information to the transmission means 6A and the corresponding delay in transferring to the transmission means 6B the radio signals can be transmitted from the antenna 9A of the transceiver unit B_{ma} substantially without time shifting, or time shifted in relation to the transmission of corresponding radio signals from the antenna 9B of the other transceiver B_{mb} .

The radio signals from the antenna 9A in B_{ma} arrive at a given mobile in the cell C_m , e.g. the mobile MS_1 , with or without time shift in relation to corresponding radio signals from the antenna 9B in B_{mb} . The possible time shift on arrival at the mobile depends partly on possible time shifting at transmission from the antennas and partly on possible difference in propagation time for the radio waves from the antennas. The transmission time shifting means 2A and 2B have a variable delay and can be controlled by the line and control unit 1, such that the signals are transmitted from the antenna 9A in B_{ma} time-shifted more or less before or after corresponding signals from the antenna 9B in B_{mb} . In the preferred embodiment according to FIG. 2, the line and control unit 1 controls the variable delays in the transmission time shifting means 2A and 2B so that the differences in delay in the cables L_{ma} and L_{mb} as well as the differences in the radio signal propagation times are counteracted. This may also be expressed by saying that the line and control unit controls the variable delays in the transmission time shifting means 2A and 2B, such that the time shift of the radio waves on arrival at the mobile is decreased compared with the situation where the means 2A and 2B have the same fixed delay. It could be thought that the ideal case were that the line and control unit controlled the delays in the time shifting means 2A and 2B so that the digitally modulated signals transmitted from the antenna in B_{ma} arrived at the antenna in MS_1 , exactly simultaneously and in phase with corresponding signals transmitted from the antenna in B_{mb} . In practice, this is neither striven for nor normally achieved. Reflections occur as the radio signals are propagated between the antennas, and the mobile has an adaptive equaliser. It is therefore not necessary for the signals from the different transceiver units to arrive exactly simultaneously to the mobile. On the contrary, there is preferably sought a small time shift to achieve diversity against Rayleigh fading. One not skilled in this art and who is desirous of obtaining further information can find it in the technical literature and in publications such as: "Radio Test Performance of a Narrowband

TDMA System-DMS 90", J-E Stjernvall, B berg,
K. Raith, T. Bäckström and R. Löfdahl.

In principle, there are at least two conceivable methods of determining how the line and control unit 1 shall control the delay in the transmission time shifting means 2A and 2B. One method is to estimate in the fixed part of the mobile radio system the time shift between the mobiles radio signals at one of the transceivers B_{ma} and corresponding radio signals at the other transceiver B_{mb} . There is thus obtained an estimation of the differences in propagation time to the mobile, these differences depending on the position of the mobile. Remaining differences in delay are related to the fixed part of the mobile radio system, e.g. differences in length of the cables L_{ma} and L_{mb} and are not dependent on the position of the mobile. In the embodiment according to FIG. 2, this method can be applied in practice such that the delays in the reception time shifting means 3A and 3B are adjusted so that information received from the mobile MS_1 at B_{ma} arrives at the line and control unit 1 simultaneously as corresponding information received at B_{mb} from the mobile station MS_1 arrives at the line and control unit 1. The delays in the transmission time shifting means 2A and 2B are subsequently adjusted in correspondence with the optimum delays in the reception time shifting means 3A and 3B.

The other method is to estimate in the mobile the difference in arrival time or time shift between the digitally modulated radio signals from one transceiver B_{ma} and the corresponding digital signals from the other transceiver B_{mb} . Some kind of encoding of the radio signals is required for this, which indicates from which transceiver they are transmitted. In TDMA systems it is known to transmit special synchronising words. These can be utilised if they are formed or supplemented with additional individual words so that two base transmitters for the same cell do not only have identical synchronising words. Alternatively, special synchronising words can be transmitted from the base station transmitters solely to enable the mobile to estimate the differences in arrival times or time shifts. The mobile transmits information about the estimated arrival time difference or time shift via radio signals to the fixed part of the system, where it is utilised for controlling the transmission time shifting means 2A and 2B. The line and control unit 1 then receives, via the respective line units 5A, 4A and 5B, 4B, information about estimated arrival time difference from the mobile in the same way as the line and control unit obtains message information from the mobile.

It is conceivable per se, but hardly to be preferred, to combine both methods for controlling the transmission time shift in a mobile radio system according to FIG. 2.

Measuring the difference in arrival time or time shifting for corresponding radio signals can be performed in a conventional way, e.g. with the aid of correlation. In the cases where the radio signals conventionally contain predetermined synchronising patterns (words), the time difference between the appearance of these in different signals can be measured using conventional methods. A mobile control means 18 and/or a base line and control unit 1 or 10, possible in combination with the transceivers' line units 5A and 5B can then include time measurement means for estimating reception time shifting, or arrival time comparison means for comparing arrival times.

When so required, a base preferably conventionally utilises the same transmitter means and antenna for

smitting, in time multiplex within the same frequency range, radio signals digitally modulated with message information to different mobiles associated with the same cell. Radio signals with message information to a given mobile are then transmitted from different base transmitters with a possible transmission time shift which is specially adjusted with regard to the position of this particular mobile. The case can arise where a base in a mobile radio system needs to transmit a radio signal with information other than message information intended for reception by several or all of the mobiles in the cell, e.g. information as to the identity of the base/cell. Such signals are preferably transmitted simultaneously without mutual time shifting, from the transceivers B_{ma} , B_{mb} and B_{na} , B_{nb} of the base in a mobile radio system according to FIG. 2. The transmission time shifting means are then controlled to a balancing state where the delay of information from the line and control unit 1 to the antenna in one transceiver B_{ma} is equally as great as the delay of information from the line and control unit 1 to the antenna in the other transceiver B_{mb} . The corresponding situation can apply when a base "listens" in unoccupied combinations of time slot and frequency range for set up calls from mobiles in unknown positions relative to the transceivers of the base. The reception time shifting means 3A and 3B can then be controlled to a balancing state where the delay of the message information from the antenna in one transceiver B_{na} to the line and control unit 9 is equally as great as the delay of information from the antenna in the other transceiver B_{nb} to the line and control unit 9.

The mobiles MS_1 and MS_2 have adaptive equalisers, whereby the digital modulation during a modulation time interval in the radio signals transmitted from a base transmitter can be reconstructed from signals received during a reception time interval. In known cellular, digital, mobile radio systems with only one base transmitter per cell, the reception time interval of the equalisers is dimensioned according as the dispersion on the radio channel, i.e. expected time shifts between corresponding signals from a single base transmitter due to reflections. Because of the equaliser, not only the radio signal having the greatest amplitude or arriving first to the mobile station is utilised for reconstructing the digital modulation, but also other corresponding radio signals arriving with a time shift within the extent of the equaliser's reception time interval can be utilised. The mobiles in a system according to FIGS. 1 and 2 preferably have equalisers which are dimensioned such that the reception time interval of the mobile in reconstruction of the digital modulation is greater than the time it takes for signals to propagate a distance as long as the greatest distance between two base transmitters associated with the same cell within a restricted geographical area. With the base transmitters placed according to FIG. 1, the mobile equalisers would thus be dimensioned for a reception interval in reconstruction which is greater than $2L/c$. However, there can be dispersion, and reflections can extend the propagation time from a base transmitter to a mobile more than the extension of the propagation time from another base transmitter for the same cells. The reception time interval of the mobiles is therefore preferably substantially greater than the time it takes for radio signals to propagate a distance which is just as great as the greatest distance between two base transmitters associated with the same cell within the geographical area in question.

In mobile radio systems according to FIGS. 1 and 2, the modulation time interval of the digital modulation of the signals can be of the same order of magnitude as the time it takes for radio signals to propagate a distance just as long as the greatest transmitting distance between two base station transmitters serving the same cell within a limited area. Although the use of extra base transmitters in combination with equalisers described affords greater advantages the smaller the modulation time interval is in relation to this propagation time, and the described combined use maybe has its greatest importance when the modulation time interval has the same size as or is less than the mentioned propagation time, the combined use of equalisers and extra base transmitters can mean substantial advantages even when the modulation time interval is some few times greater than the mentioned propagation time.

It is conceivable to use different kinds of digital modulation in a mobile radio system, whereby somewhat different relationships can exist between information transmission rate and modulation time intervals. In digital modulation of the radio signals involving transmission of one symbol at a time of a sequence of uncorrelated symbols, the modulation time interval will be the time during which a single symbol is decisive for the digital modulation. For example, if a sequence of binary symbols individually and one at a time determines the modulation, the modulation time interval will be the time during which one symbol determines the modulation. This can also be expressed by saying that the modulation time interval will be the inverted value of the transmission rate in bits. In digital modulation of the signals involving two or more at a time of a sequence of digital symbols being decisive for the modulation during wholly or partly overlapping times, the modulation interval can be the time when a preceeding, but not the nearest subsequent symbol affects the modulation. For example, in digital modulation according to SE 8102802-9, FIGS. 1-2, a symbol affects the phase of a carrier wave during a time interval $3T$. The nearest preceeding symbol also affects the phase change of the carrier wave during a first part $2T$ of the time interval $3T$. The nearest subsequent symbol also affects the change of phase of the carrier wave during a last part of $2T$ of the time interval $3T$. In this case the modulation time interval will be T , which agrees with what is called the symbol time interval in SE 8102802-9. In general, it can be said that the modulation time interval is to be interpreted as the interval in time between two successive changes in the transmitted digital modulation.

Perhaps the most usual reason for handover in conventional mobile radio systems is that a mobile moves from one area which is best served by one base to another area which is best served by another base. Of course, there may be other reasons, e.g. changed traffic conditions or changed radio reception conditions.

When three or more bases can receive radio signals from a mobile, the position of the latter can be estimated by comparison of the radio propagation times. The estimation can be improved if more than three bases are used. Knowledge of the position of the mobile can be used by the stationary part of the mobile radio system for selecting what bases are suitable for use as new bases when handing over the responsibility. The mobile radio exchange or other stationary part of the system assigns new bases the responsibility in a manner such that communication can be maintained with good quality as the mobile travels through the cell structure.

Knowledge of the position of the mobile can also be used as a criterion for performing the handing over of responsibility. For example, if the mobile moves out of the cell which is serving it at the moment, this is an indication that a handover of responsibility should soon take place, irrespective of whether the communication quality is still good.

In different known mobile radio systems, the decision for handing over can take place in more or less different ways. Different criteria have been proposed for the decision as to if and where handover is to take place. Collection of the basis for the handover decision can take place in different ways. The distribution of tasks and the signalling in connection with handover between mobiles and the stationary part of the mobile radio system can differ from system to system. All this is well known to one skilled in the art. One not skilled in the art can obtain necessary information from the technical literature or United States patents in the field of cellular mobile radio.

What is distinguishing for handing over the responsibility in accordance with the present invention is primarily the actual execution of handover. For the handover decision, at least in certain cases, known parameters can be used such as the signal-noise ratio for transmitting signals to and from the mobiles. The signal-noise ratio or other parameters can be measured, either solely in the stationary part of the mobile radio system e.g. by the base central or control units or solely in the mobiles by the reception and control means or in both mobiles and the stationary part. In the handover decision, the traffic conditions in different parts of the mobile radio system can be given attention, substantially conventionally, e.g. if certain bases tend to have too high traffic while adjacent bases have unoccupied capacity for further traffic.

An embodiment of the execution of handing over responsibility for the communication in accordance with the invention will now be described in connection with FIG. 2. For the sake of simplicity, it is assumed that handing over the responsibility will take place in conjunction with a mobile moving from the position of MS_1 in FIG. 2 to the position of MS_2 in FIG. 2.

Sometime before the handover, the mobile is in the position of MS_1 within the coverage area of the base station B_m , but outside the coverage area of the base station B_n , i.e. the radio transmission conditions for radio signals between the mobile station and B_{ma} or B_{mb} are sufficiently good, but the radio transmission conditions for radio signals between the mobile and B_{na} and B_{nb} are too poor.

Sometime after the handover, the mobile is in the position of MS_2 within the coverage area for the base B_n , but outside the coverage area for the base B_m , i.e. the radio transmission conditions for radio signals between the mobile and B_{na} and B_{nb} are sufficiently good, but the radio transmission conditions for radio signals between the mobile and B_{ma} and B_{mb} are too poor.

When the mobile has moved to position somewhere between the positions of MS_1 and MS_2 , a handover decision is made, and this decision may be based on facts such as the radio transmission conditions and traffic within the coverage areas of the base stations. The decision is made by the mobile radio exchange or possible some other stationary part of the mobile radio system.

Before handing over the responsibility for communication with the mobile, it is tested in the stationary part of the mobile radio system whether the second base

transmitter can use the same radio channel after handover for transmitting message information to the mobile as the radio channel the first base transmitter used before handover. This may also be expressed by saying that the stationary part tests whether a change of radio channel can be avoided on handover.

This testing takes place according to predetermined rules based on predetermined parameters. For example, if the base to which the responsibility is to be handed over already utilises the radio channel in question for communication with another mobile having higher priority, a change of a radio channel must take place on handover. On the other hand, if the base to which responsibility is to be handed over does not utilise the radio channel in question, and possible transmission on this radio channel would not interfere with other traffic, there is no need for changing channels on handover. Another reason for having to change channels is that the channel in question has too much interference in the cell served by the base to which responsibility is to be handed over. Other rules or reasons for, and against, changing channels will be understood by one skilled in this art.

After a decision as to handover and radio channel has been made, one of the base transmitters B_{na} or B_{nb} begins to transmit the same message information to the mobile as the base transmitters B_{ma} and B_{mb} . This base transmitter is preferably transmitting on the same channel as the base transmitters B_{ma} and B_{mb} . In a TDMA mobile radio system, this means that B_{na} or B_{nb} begin to transmit the same message information as B_{ma} and B_{mb} on the same radio frequency and in the same time slot as B_{ma} and B_{mb} . The transmission times at B_{na} and B_{nb} of the radio signals is preferably adjusted to corresponding transmission times for the signals at B_{ma} and B_{mb} in accordance with what has been described above. After transmission of the message information to the mobile has been started from B_{na} and B_{nb} , the transmission of corresponding message information to the mobiles from one of the base transmitters B_{ma} and B_{mb} is terminated. One of the base transmitters B_{ma} or B_{mb} then transmits the same message information, e.g. speech or data, to the mobile as one of the base transmitters B_{na} and B_{nb} . Neither one of the two other base transmitters in FIG. 2 then transmit corresponding information to the mobile. The one of the base transmitters B_{ma} and B_{mb} which has the best radio transmission conditions and the one of base transmitters B_{na} and B_{nb} which has the best radio transmission conditions preferably transmit to the mobile.

After one of the base transmitters B_{ma} or B_{mb} has ceased to transmit message information to the mobile, a further one of the base transmitters B_{na} or B_{nb} begins to send message information to the mobile. Both B_{na} and B_{nb} as well as one of the other base transmitters B_{ma} and B_{mb} are then transmitting the same message information to the mobile. All three transmitters preferably transmit on the same radio channel, and in a TDMA mobile radio system this means the same radio frequency and same time slot. The transmission times of B_{na} and B_{nb} and at the third base transmitter of the radio signals are preferably adjusted to each other in agreement with what has been described above.

After both B_{na} and B_{nb} have begun to transmit the same message information to the mobile as the remaining base transmitter of B_{ma} and B_{mb} , the transmission of message information to the mobile is terminated from this remaining base transmitter. Both B_{na} and B_{nb} are

When transmitting message information to the mobile, whereas none of the base transmitters B_{ma} and B_{mb} is transmitting such information to the mobile. At this, the responsibility for communication between the mobile has been handed over from the base transmitters B_{ma} and B_{mb} to the base transmitters B_{na} and B_{nb} . This may also be expressed by saying that responsibility for the communication has been handed over from the base B_m to the base B_n , i.e. an execution of handover is completed.

During the whole of the above described handover, at least two of the base transmitters send the same message information to the mobile. During certain times there are three base transmitters sending the same message information. On the other hand, all base transmitters of the affected stations never send the same information to the mobile. The risk of accidental interruption in the transmission of message information between the mobile and the fixed part of the mobile radio system will thus be small. Simultaneously, the receiving time shift at the mobile will be less than if all base transmitters were to send the same message information to the mobile. In addition, re-use of radio channels if facilitated in the mobile radio system when all affected base transmitters never send simultaneously on the same radio channel.

If, for some reason, it is necessary to change radio channels in conjunction with handing over the responsibility for communication from the base B_m to the base B_n , it is to be preferred that the channel which is to be used after handover is selected such that during a transition time the mobile can receive the same message information on both channels. In a TDMA system according to FIG. 2, this means that a base transmitter, e.g. B_{na} , begins to transmit the same message information as the base transmitters B_{ma} and B_{mb} , but in another times slot, so that the radio signals from B_{na} arrive at the mobile during other times other than the radio signals from B_{ma} and B_{mb} . When the base transmitter B_{nb} begins to transmit message information to the mobile, it transmits in the same time slot as B_{na} . Due to B_{na} and B_{nb} transmitting message information in a time slot than the one used by B_{ma} and B_{mb} , the mobile can receive, by modifying its radio receiver tuning, both the message information transmitted by B_{na} and/or B_{nb} and the message information transmitted by B_{ma} and B_{mb} . In this case, however, the mobile must be given advance information as to the handover.

If handing over the responsibility for communication is to take place from three or more base transmitters to more than two base transmitters, its execution will naturally be somewhat different than what has been described in connection with FIG. 2, since the transmission from three or more base transmitters is to be terminated or started. Different orders for starting and terminating transmission are then conceivable. Common for these variants is, however, that at least two base transmitters always transmit the same message information to the mobile. In addition, the transmission of message information is always started from at least one base, to which responsibility shall be handed over before transmission of message information is terminated from all base transmitters, from which the responsibility shall be handed over. The order is preferably such that never all base transmitters simultaneously transmit the same message information to the mobile in conjunction with the handover.

A mobile radio system where at least two base transmitters are simultaneously responsible for transmitting

Message information to a mobile does not need be formed according to the above, but can differ to a greater or lesser extent from the system described above. For example, it is conceivable to co-localise at least parts of the equipment in an ordinary base transmitter with parts of the equipment in the extra base transmitter for the same cell, providing that the antennas are spaced from each other. In an extreme case, it is conceivable, in principle, for all equipment excepting the antennas to be co-localised to one place, i.e. in the vicinity of one of the antennas, and that the antennas are fed by signals at radio frequency via a cable from this place. By "base transmitter" shall be accordingly understood at least a transmitter antenna for radio signals and preferably more or less of the remaining means required in a base. In a base transmitter there are preferably included at least means corresponding to the means included in a transceiver unit B_{ma} or B_{mb} in FIG. 2.

To avoid misunderstanding, it is pointed out that none of the base transmitters to which responsibility shall be handed over is a slave transmitter to any base transmitter from which the responsibility shall be handed over. From FIG. 2 it will be seen, for example, that the base transmitters B_{na} and B_{nb} can be controlled directly by the mobile radio exchange MSC and independently of how the exchange controls the base transmitters B_{ma} and B_{mb} .

A method in accordance with the invention is of course not restricted to a given implementation of base transmitter, even if it is assumed in the example above that base transmitters can start and terminate transmission at different times.

In actual fact, a method in accordance with the invention is not restricted to mobile radio systems with two or more base transmitters per cell, and it is conceivable to apply embodiments of a method in accordance with the invention in a mobile system, the method involves, summarily explained, that the same radio channel is used both before and after handover, if possible, for transmitting message information to the mobile. A decision on handover is preferably made in the mobile radio exchange or other stationary part of the system, and the handover takes place without the mobile being formed beforehand. If the mobiles have equalizers and the system transmits message information digitally by digital modulation of radio signals, it is also preferably in this case as well that the transmission of message information is started from the base transmitter to which responsibility is to be handed over, before transmission of the same information is terminated from the base transmitter from which responsibility is to be handed over. In this case also, the same message information is transmitted during a transition period to the mobile from two base transmitters. If it is not possible to utilise the same radio channel for some reason, it is then preferably in such a system to select the different channels such that during a transition period the mobile can receive the transmissions from the different base transmitters essentially without their mutually obstructing each other. In a TDMA system with mobiles according to FIG. 2, this means that the base transmitters transmit in different time slots. The advantages with a method in accordance with the invention will then be substantially less, however, than in a system according to FIGS. 1 and 2, where the same radio channel can be utilised.

A method in accordance with the invention is not limited to described embodiments or mobile radio sys-

tems according to FIGS. 1 and 2, but can be applied and varied within the scope of the claims.

I claim:

1. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting, from a first base station transmitter, radio signals digitally modulated with message information to a mobile station;

while transmitting the radio signals from the first base station transmitter to the mobile station, beginning to transmit from a second base station transmitter to the mobile station radio signals digitally modulated with substantially the same message information;

combining, in said mobile station, information transmitted by said first base station transmitter and information transmitted by said second base station transmitter to reconstruct said message information; and

terminating the transmission from the first base station transmitter to the mobile station while continuing to transmit from the second base station transmitter radio signals digitally modulated with message information to the mobile station.

2. A method according to claim 1 comprising the step of:

transmitting, from a third base station transmitter to the mobile station, radio signals digitally modulated with substantially the same message information as the signals transmitted by the first or second base station transmitters.

3. A method according to claim 1 further comprising the step of:

transmitting, from a fourth base station transmitter to the mobile station, radio signals digitally modulated with substantially the same message information as the signals from the second base station transmitter.

4. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting, from a first base station transmitter for a first cell, radio signals digitally modulated with message information to a mobile station;

while transmitting the radio signals from the first base station transmitter to the mobile station, beginning to transmit, from a second base station transmitter for a second cell to the mobile station, radio signals digitally modulated with substantially the same message information;

combining, in said mobile station, information transmitted by said first base station transmitter and information transmitted by said second base station transmitter to reconstruct said message information; and

terminating the transmission from the first base station transmitter to the mobile station while continuing to transmit from the second base station transmitter.

5. A method according to claim 4 further comprising the step of:

transmitting, from a third base station transmitter to the mobile station, radio signals digitally modulated with substantially the same message information to as the signals transmitted by the first or second base station transmitters.

6. A method according to claim 4 comprising the step of:

transmitting, from a fourth base station transmitter to the mobile station, radio signals digitally modulated with substantially the same message information as the signals from the second base station transmitter.

7. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting, from a first base station transmitter to a mobile station, radio signals digitally modulated with message information to a mobile station;

transmitting, from a second base station transmitter, radio signals digitally modulated with substantially the same message information to a mobile station;

combining, in said mobile station, information transmitted by said first base station transmitter and information transmitted by said second base station transmitter to reconstruct said message information; and

before terminating the transmission from the first or second base station transmitter of the digitally modulated radio signals to the mobile station, beginning to transmit from a third base station transmitter radio signals digitally modulated with substantially the same message information as the signals from the first and second base station transmitters.

8. A method according to claim 7 further comprising the step of:

terminating the transmission from the first base station transmitter to the mobile station while continuing to transmit from the second and third base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

9. A method according to claim 7 further comprising the step of:

terminating the transmission from the second base station transmitter while continuing to transmit from the third base station transmitters radio signals digitally modulated with message information to the mobile station.

10. A method according to claim 7 further comprising the steps of:

before terminating the transmission of the digitally modulated radio signals from the second base station transmitter, beginning to transmit from a fourth base station transmitter to the mobile station radio signals digitally modulated with substantially the same message information as the signals from the second and third base station transmitters; and

terminating the transmission from the second base station transmitter while continuing to transmit from the third and fourth base stations transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

11. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting, from a first base station transmitter, for a first cell radio signals digitally modulated with message information to a mobile station;

transmitting from a second base station transmitter radio signals digitally modulated with substantially the same message information to the mobile station; [and]

before terminating the transmission from the first or second base station transmitter to the mobile station, beginning to transmit from a third base station transmitter for

July 22

a second cell radio signals digitally modulated with substantially the same message information as the signals from the first and second base station transmitters; and combining, in said mobile station, information transmitted by at least two of said first, second and third base station transmitters to reconstruct said message information.

12. A method according to claim 11 further comprising the step of:

terminating the transmission from the first base station transmitter while continuing to transmit from the second and third base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

13. A method according to claim 11 further comprising the step of:

terminating the transmission from the second base station transmitter while continuing to transmit from the third base station transmitter radio signals digitally modulated with message information to the mobile station.

14. A method according to claim 11 further comprising the step of:

before terminating the transmission from the second base station transmitter, beginning to transmit from a fourth base station transmitter to the mobile station radio signals digitally modulated with substantially the same message information as the signals from the second and third base station transmitters; and

terminating the transmission from the second base station transmitter while continuing to transmit from the third and fourth base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

Sub 93/

15. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting, from a first base station transmitter, radio signals digitally modulated with message information to a mobile station;

transmitting, from a second base station transmitter, radio signals digitally modulated with substantially the same message information to the mobile station;

before terminating the transmission from the first or second base station transmitter to the mobile station, beginning to transmit from a third base station transmitter radio signals digitally modulated with substantially the same message information as the signals from the first and second base station transmitters; [and]

combining, in said mobile station, information transmitted by at least two of said first, second and third base station transmitters to reconstruct said message information; and

terminating the transmission from the first base station transmitter while continuing to transmit from the second and third base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

16. A method according to claim 15 further comprising the step of:

terminating the transmission from the second base station transmitter while continuing to transmit from the third base station transmitter radio signals digitally modulated with message information to the mobile station.

17. A method according to claim 15 further comprising the steps of:

before terminating the transmission from the second base station transmitter, beginning to transmit from a fourth base station transmitter to the mobile station radio signals digitally modulated with substantially the same message information as the signals from the second and third base station transmitters; and

terminating the transmission from the second base station transmitter while continuing to transmit from the third and fourth base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

18. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting, from a first base station transmitter for a first cell, radio signals digitally modulated with message information to a mobile station;

transmitting, from a second base station transmitter, radio signals digitally modulated with substantially the same message information to the mobile station;

before terminating the transmission from the first or second base station transmitter to the mobile station, beginning to transmit from a third base station transmitter for a second cell radio signals digitally modulated with substantially the same message information as the signals from the first and second base station transmitters; [and]

combining, in said mobile station, information transmitted by at least two of said first, second and third base station transmitters to reconstruct said message information; and

terminating the transmission from the first base station transmitter while continuing to transmit from the second and third base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

19. A method according to claim 18 further comprising the step of:

terminating the transmission from the second base station transmitter while continuing to transmit from the third base station transmitter radio signals digitally modulated with message information to the mobile station.

20. A method according to claim 18 further comprising the steps of:

before terminating the transmission from the second base station transmitter, beginning to transmit from a fourth base station transmitter to the mobile station radio signals digitally modulated with substantially the same message information as the signals from the second and third base station transmitters; and

terminating the transmission from the second base station transmitter while continuing to transmit from the third and fourth base station transmitters radio signals digitally modulated with substantially the same message information to the mobile station.

21. A method of communication in a cellular mobile radio system having a plurality of base station transmitters and mobile stations comprising the steps of:

transmitting to a mobile station, from each of a first base station transmitter, a second base station transmitter and a third base station transmitter, radio signals digitally modulated with substantially the same message information; [and]


combining, in said mobile station, information transmitted by at least two of said first, second and third base station transmitters to reconstruct said message information; and

8/1/95
terminating the transmission of the digitally modulated signals from the first base station transmitter to the mobile station while continuing to transmit from the second and third base station transmitters.

add a6

2025 RELEASE UNDER E.O. 14176

PLEASE
DO NOT SCAN

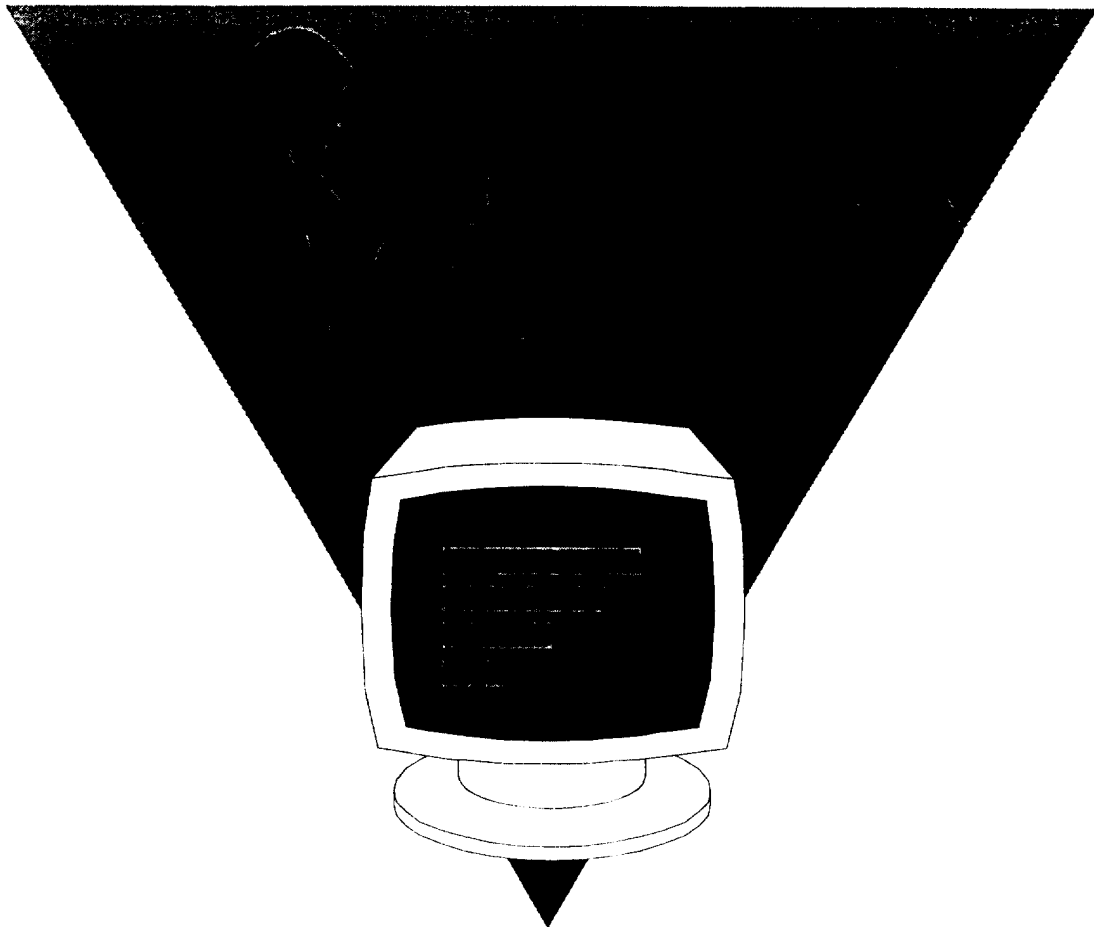

PRIOR ART/OR
RELATED
MISCELLANEOUS
DOCUMENTS

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

ATTORNEYS AT LAW

CORRESPONDENCE TO:
P.O. BOX 1404
ALEXANDRIA, VIRGINIA 22313-1404
TELEPHONE: (703) 836-6620
GROUP 3 FAX: (703) 836-2021
GROUP 4 FAX: (703) 836-0028

OFFICE ADDRESS:
GEORGE MASON BUILDING
699 PRINCE STREET
ALEXANDRIA, VIRGINIA 22314-3187

JAMES P. BURNS (1896-1982)
VERNON H. DOANE (1909-1960)
J. PRESTON SWECKER (1904-1996)

PETER H. SMOLKA
ROY H. MASSENGILL
WILLIAM A. KNOELLER
OF COUNSEL

CHARLES T. JOYNER
BRIAN P. O'SHAUGHNESSY
COUNSEL

WILLIAM L. MATHIS
ROBERT S. SWECKER
PLATON N. MANDROS
BENTON S. DUFFETT, JR.
JOSEPH R. MAGNONE
NORMAN H. STEPNO
RONALD L. GRUDZIECKI
FREDERICK G. MICHAUD, JR.
ALAN E. KOPECKI
REGIS E. SLUTTER
SAMUEL C. MILLER III
RALPH L. FREELAND, JR.†
ROBERT G. MUKAI
GEORGE A. HOVANEK, JR.
JAMES A. LABARRE
E. JOSEPH GESS
R. DANNY HUNTINGTON
ERIC H. WEISBLATT
JAMES W. PETERSON†
TERESA STANEK REA*
ROBERT E. KREBS†
ADRIENNE L. WHITE
ROBERT M. SCHULMAN*
WILLIAM C. ROWLAND
T. GENE DILLAHUNTY
PATRICK C. KEANE*

B. JEFFERSON BOGGS, JR.
WILLIAM H. BENZ†
PETER K. SKIFF
RICHARD J. MCGRATH
MATTHEW L. SCHNEIDER
MICHAEL G. SAVAGE
GERALD F. SWISS†
DAVID M. SCHLITZ
ROBERT DEVOS*
B. PARKER LIVINGSTON, JR.
BASSAM N. ABRAHIM*
RONNI S. HILLIONS
STEVEN S. PAYNE
MICHAEL J. GURE†
CHARLES F. WIELAND III
BRUCE T. WIEDER*
TODD R. WALTERS
HAROLD R. BROWN III
KENNETH B. LEFFLER
MARTIN FARRELL*
LESLIE A. MOOI†
DONNA M. MEUTH
ALLEN R. BAUM
STEVEN M. DUBOIS
EARL A. BRIGHT III†
CHARLES H. LEW†

ROBIN L. TESKIN
RICHARD C. EKSTROM
THOMAS M. BLASEY*
BRADLEY J. OLSON*
FRED W. HATHAWAY*
ALLAN M. SOOBERT
JONATHAN D. BASKIN
NHAT D. PHAN
JOHN E. CURTIN
MARK R. KRESLOFF†
MATTHEW P. BLISCHAK*
LESLIE J. BOLEY†
JEFFREY A. PADE*
BARBARA W. WALKER*
MICHAEL A. WRENN
JEFFREY A. HAGENAH†
ROBERT S. BABAYI*
REL S. AMBROZY*
WENDI L. WEINSTEIN*
SUSAN M. DADIO
ADAM J. CERMAK
M. DAVID REAM*
MARY ANN DILLAHUNTY†
KRISHNA V. KALIDINDI*
CINDY A. CHERICHETTI
CURTIS A. EVANS*

SAN FRANCISCO, CA AREA OFFICE
BUILDING 4 - SUITE 160
3000 SAND HILL ROAD
MENLO PARK, CALIFORNIA 94025-7116
TELEPHONE: (650) 854-7400
FAX: (650) 854-8275

RESEARCH TRIANGLE, NC AREA OFFICE
1009 SLATER ROAD, SUITE 210
DURHAM, NORTH CAROLINA 27703
TELEPHONE: (919) 941-9240
FAX: (919) 941-1515

M. KATHERINE BAUMEISTER
SUSAN E. HEMINGER
PATENT AGENT

† CALIFORNIA BAR
◇ NORTH CAROLINA BAR
* BARS OTHER THAN VA, CA & NC

September 26, 1997

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application for Reissue of
U.S. Patent No. 5,327,577
Our Ref.: 027556-431


Sir:

Transmitted herewith for filing is the reissue patent application of Jan E. Uddenfeldt for
"HANDOVER METHOD FOR MOBILE RADIO SYSTEM".

The application comprises a copy of the original Letters Patent No. 5,327,577 including
amended claims 1, 4, 7, 11, 15, 18 and 21 and original claims 2, 3, 5, 6, 8-10, 12-14, 16, 17, 19 and
20.

It is respectfully requested that this application be granted a serial number and filing
date pursuant to 37 C.F.R. § 1.53. The requisite DECLARATION OFFER TO SURRENDER,
ASSENT OF ASSIGNEE AND POWER OF ATTORNEY and CLAIM FOR CONVENTION
PRIORITY will follow.

A check in the amount of \$1,112.00 is enclosed to cover the filing fee. An order for a
title report is also enclosed.



Assistant Commissioner for Patents
September 26, 1997
Page 2

Please transfer the drawings of the original Letters Patent to this application. An informal copy of the drawings is submitted herewith as part of the application.


The Commissioner is hereby authorized to charge payment of the following fees or credit any overpayment to Deposit Account No. 02-4800:

- (a) Any additional filing fees required under 37 C.F.R. § 1.16;
- (b) Any patent application processing fees required under 37 C.F.R. § 1.16 for presentation of extra claims.

A duplicate of this letter is enclosed.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS

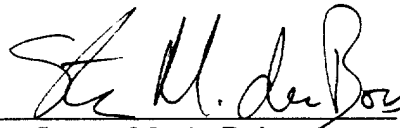By: 
Steven M. du Bois
Registration No. 35,023

SMD:jsw
Enclosures